




**SKYLIFT**

***MINI-ARBORIST***  
***39***

**Ph. 440.960.2100**  
**Fax 440.960.2104**  
**[www.skyliftus.com](http://www.skyliftus.com)**



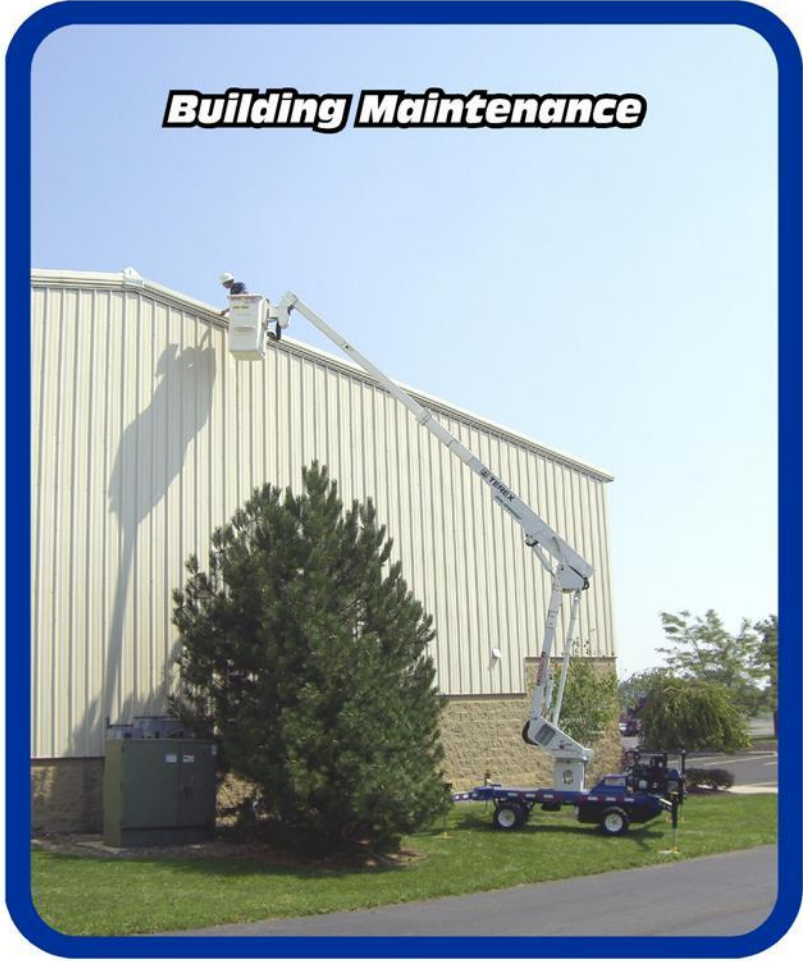



## TECHNICAL SPECIFICATIONS



# ***MINI-ARBORIST 39***

### **INSULATED BOOM: TEREX HIGH-RANGER TLP**

- End Mounted 24 x 30 x 42 Inch Platform (300 lb Capacity)
- Full Pressure Controls on Side of Platform
- ISOControl 3-D Single Stick
- Open Center Hydraulic System
- Category "C" Rating Per ANSI A92.2
- Lower Controls Above Rotation
- Continuous Rotation
- Lower Controls Override Upper Controls
- Rotating Platform
- Hydraulic Tool Circuit At Platform
- Bottom of Platform Height (A) 34 ft.
- Working Height (B) 39 ft.
- Horizontal Reach (C) 28 ft.
- Lower Boom Articulation -3 to 82°
- Upper Boom Travel -17 to 76°

### **CHASSIS: SKYLIFT MINI-ARBORIST**

- 35 Inches Wide (Fits Through Standard Gates)
- Dual Removable Wheels (Inner Wheels Solid Filled / Outer Wheels Air Filled)
- 20 HP Honda Engine (Electric Start)
- 7 Gallon Fuel Cell
- Conventional Steering (Least Amount of Turf Damage)
- Full Proportional Hydraulic Controls
- All Hydraulic Direct Motor Drive
- Outrigger / Boom Interlock
- Radial Outriggers
- Hydraulic Oil Cooler
- 12,000 GVW Trailer

### **OPTIONS**

- Rubber Track Skid Steer Drive
- Hydraulic Extendable Track
- 12V DC Emergency Power
- Kubota Diesel Engine